

Apex



LIGHTWEIGHT, CAPPED BAMBOO-PVC COMPOSITE



Intertek



LOW ENVIRONMENTAL IMPACT
Sustainable manufacturing & use of raw material

www.eva-last.com



LIGHTWEIGHT, CAPPED BAMBOO-PVC COMPOSITE

Apex offers you a resilient and natural looking composite. Its ultra-lightweight bamboo foamed-PVC core makes for easy installation and workability. Apex carries both fire and slip resistance ratings and exceptional low maintenance, requiring only basic cleaning for optimal longevity. Its protective cap is made from a resilient acrylic polymer coating for fade, scratch, and stain resistance. Apex provides long-term decay and weather protection by resisting insects, moisture, and the elements. Apex is an eco-friendly alternative to timber that prevents deforestation and premature deck replacement and uses solar power within the manufacturing process.

PRODUCT COMPOSITION



Apex products are lightweight thanks to their foamed bamboo-PVC composite core which is protected from the elements by a resilient acrylic polymer capping.




Capping material:

Engineered acrylic polymer

Core material:

Bamboo foamed-PVC
composite

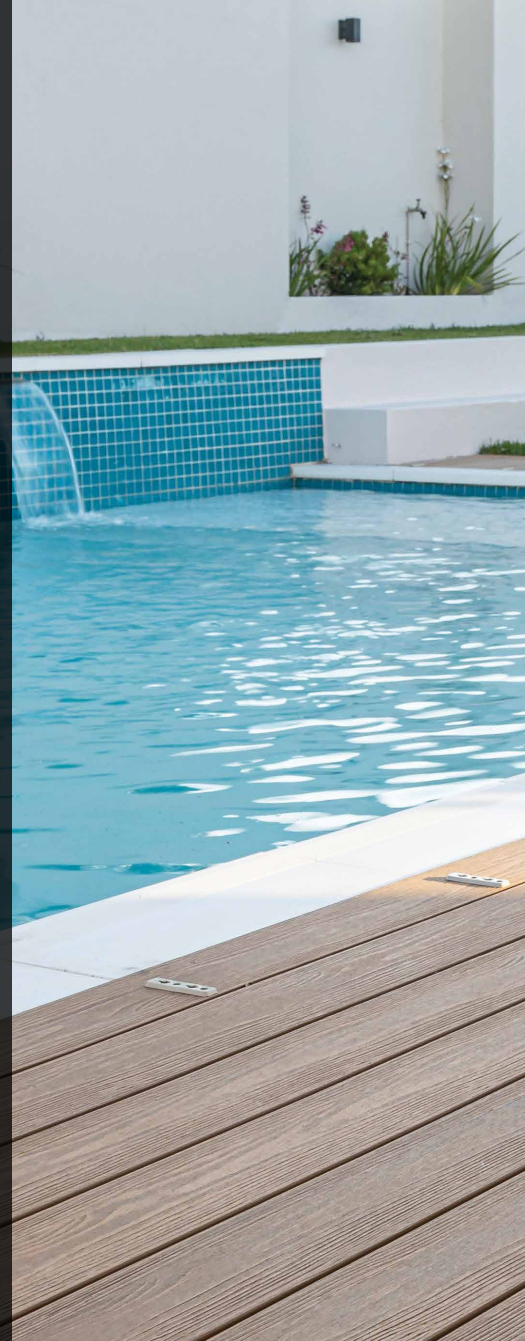



For more information on Apex visit www.eva-last.com



TAKE HOME THE BENEFITS



NATURAL AESTHETIC

Advanced technology for more natural looking composite



LIGHTWEIGHT

Ultra-lightweight bamboo-PVC core



FIRE RESISTANT

Fire resistance tested



SLIP RESISTANT

Reliable slip resistance properties



LOW-MAINTENANCE

Only basic care required for optimal longevity



PROTECTIVE CAP

Fade, scratch, & stain resistant capping technology



DECAY RESISTANT

Resists insects, moisture, & weather



ECO-FRIENDLY

Long-lasting & prevents deforestation



Apex

APEX PROFILE TYPES

Apex lightweight, capped bamboo foamed-PVC boards are designed for versatility. They can be used for decking, cladding, screening, or other creative outdoor projects. Decking boards are available in widths of 140 mm and 190 mm, as grooved boards, square edge boards, or starter boards to make your entire installation simple. Fascia boards are available for use as trim or other accents, and a composite joist is available for installing atop flat surfaces.

Grooved board

140 x 24 mm



Square edge board

140 x 24 mm



Grooved board

190 x 24 mm



Composite joist

40 x 30 mm



Fascia board

150 x 12 mm



Fascia board

184 x 14 mm



Fascia board

285 x 16 mm





LIGHTWEIGHT, CAPPED BAMBOO-PVC COMPOSITE




140 x 24 mm
190 x 24 mm



SCULPTED
GRAIN FINISH

Grooved board



GROOVED BOARD

The Apex single sided grooved board installs efficiently and securely with Chain collated clips which slot into the grooves along the edges of the board and create an uninterrupted final look.

Dimensions	140 x 24 mm
Weight	2.5 kg/m
Recommended residential joist spacing	300 mm centre to centre* <i>*Please refer to the technical documents for more information on spans and loads.</i>

Dimensions	190 x 24 mm
Weight	3.4 kg/m
Recommended residential joist spacing	350 mm centre to centre* <i>*Please refer to the technical documents for more information on spans and loads.</i>

Fasteners




Grooved edge fasteners

Compatible with Chain collated clip and screw



140 x 24 mm



SCULPTED
GRAIN FINISH

Square edge board



SQUARE EDGE BOARD

The Apex single sided square edge board is as versatile as it is durable, ideal for decking, deck and stair edges, and for use as attractive cladding or screening, and is fastened by top fixing HULK colour matching screws.

Dimensions	140 x 24 mm
Weight	2.5 kg/m
Recommended residential joist spacing	300 mm centre to centre* <i>*Please refer to the technical documents for more information on spans and loads.</i>

Fasteners



Square edge fasteners

Uses HULK composite top fixing screws



Featured: **Apex, Himalayan Cedar**
Single sided grooved and square edge decking



Apex



LIGHTWEIGHT, CAPPED BAMBOO-PVC COMPOSITE



150 x 12 mm
184 x 14 mm
285 x 16 mm



SCULPTED
GRAIN FINISH

Fascia board

FASCIA BOARDS

Apex fascia boards are non-load bearing profiles that help to add a neat finish to deck sides or areas where trim is needed. They are fastened using colour matching HULK top fixing composite trim screws.

Dimensions	150 x 12 mm
Weight	1.4 kg/m
Span	300 mm*

Dimensions	184 x 14 mm
Weight	1.9 kg/m
Span	300 mm*

Dimensions	285 x 16 mm
Weight	3.4 kg/m
Span	300 mm*


**Spans based on non-load bearing applications only*

Fasteners



Fascia trim fasteners

Uses HULK composite trim screws

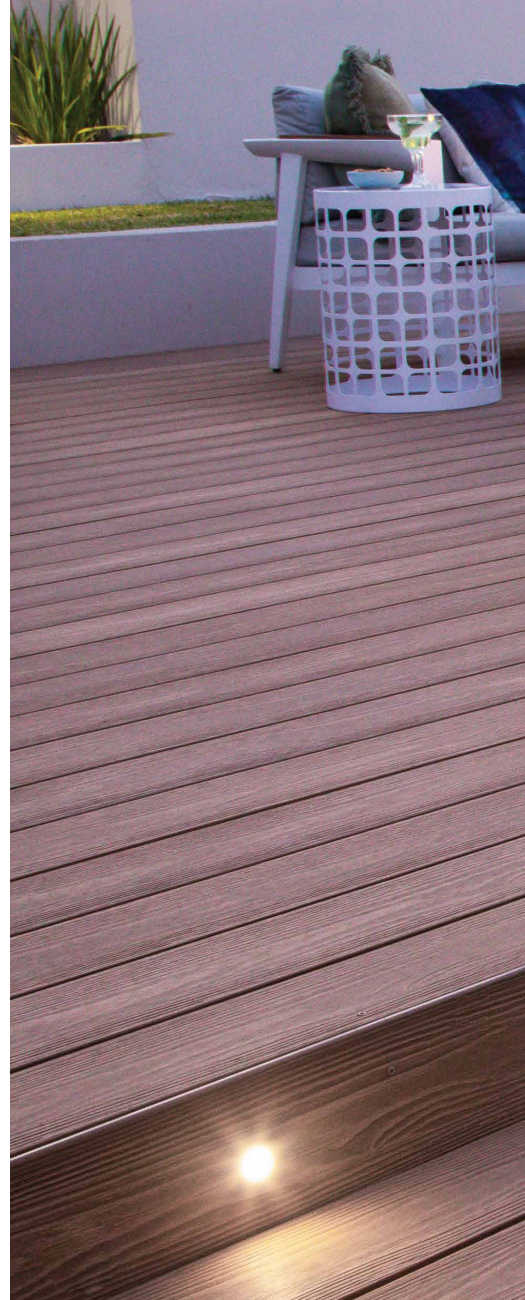



Featured: **Apex, Himalayan Cedar**
Single sided grooved and square edge decking



Apex



BAMBOO-PVC COMPOSITE JOIST




40 x 30 mm

FOAMED COMPOSITE JOIST

Apex foamed composite joists are a non-load bearing, cost-effective option for use over existing slabs such as screed, or tiled flooring, paving, and patios. Compared to standard deck installations, they are quick to install, requiring no posts or any other supporting structure.

Dimensions	40 x 30 mm
Weight	0.9 kg/m
Colour	Dark grey



Fasteners

Lay spacers between the joist and the installation surface and then nail in anchors.





Featured: Apex, Himalayan Cedar
Single sided grooved and square edge decking






Apex

APEX DUAL TONE COLOUR GUIDE

The dual tone range of Apex adds an extra layer of colour to each board to enhance the natural look of your composite project. The variance in shades within a single composite profile beautifully showcases the colour tones found in timber making your composite all the more striking. Dual tone colours are ideal for mid-to-large-scale composite decks and projects or other areas that are all about that natural look.



Sculpted grain finish

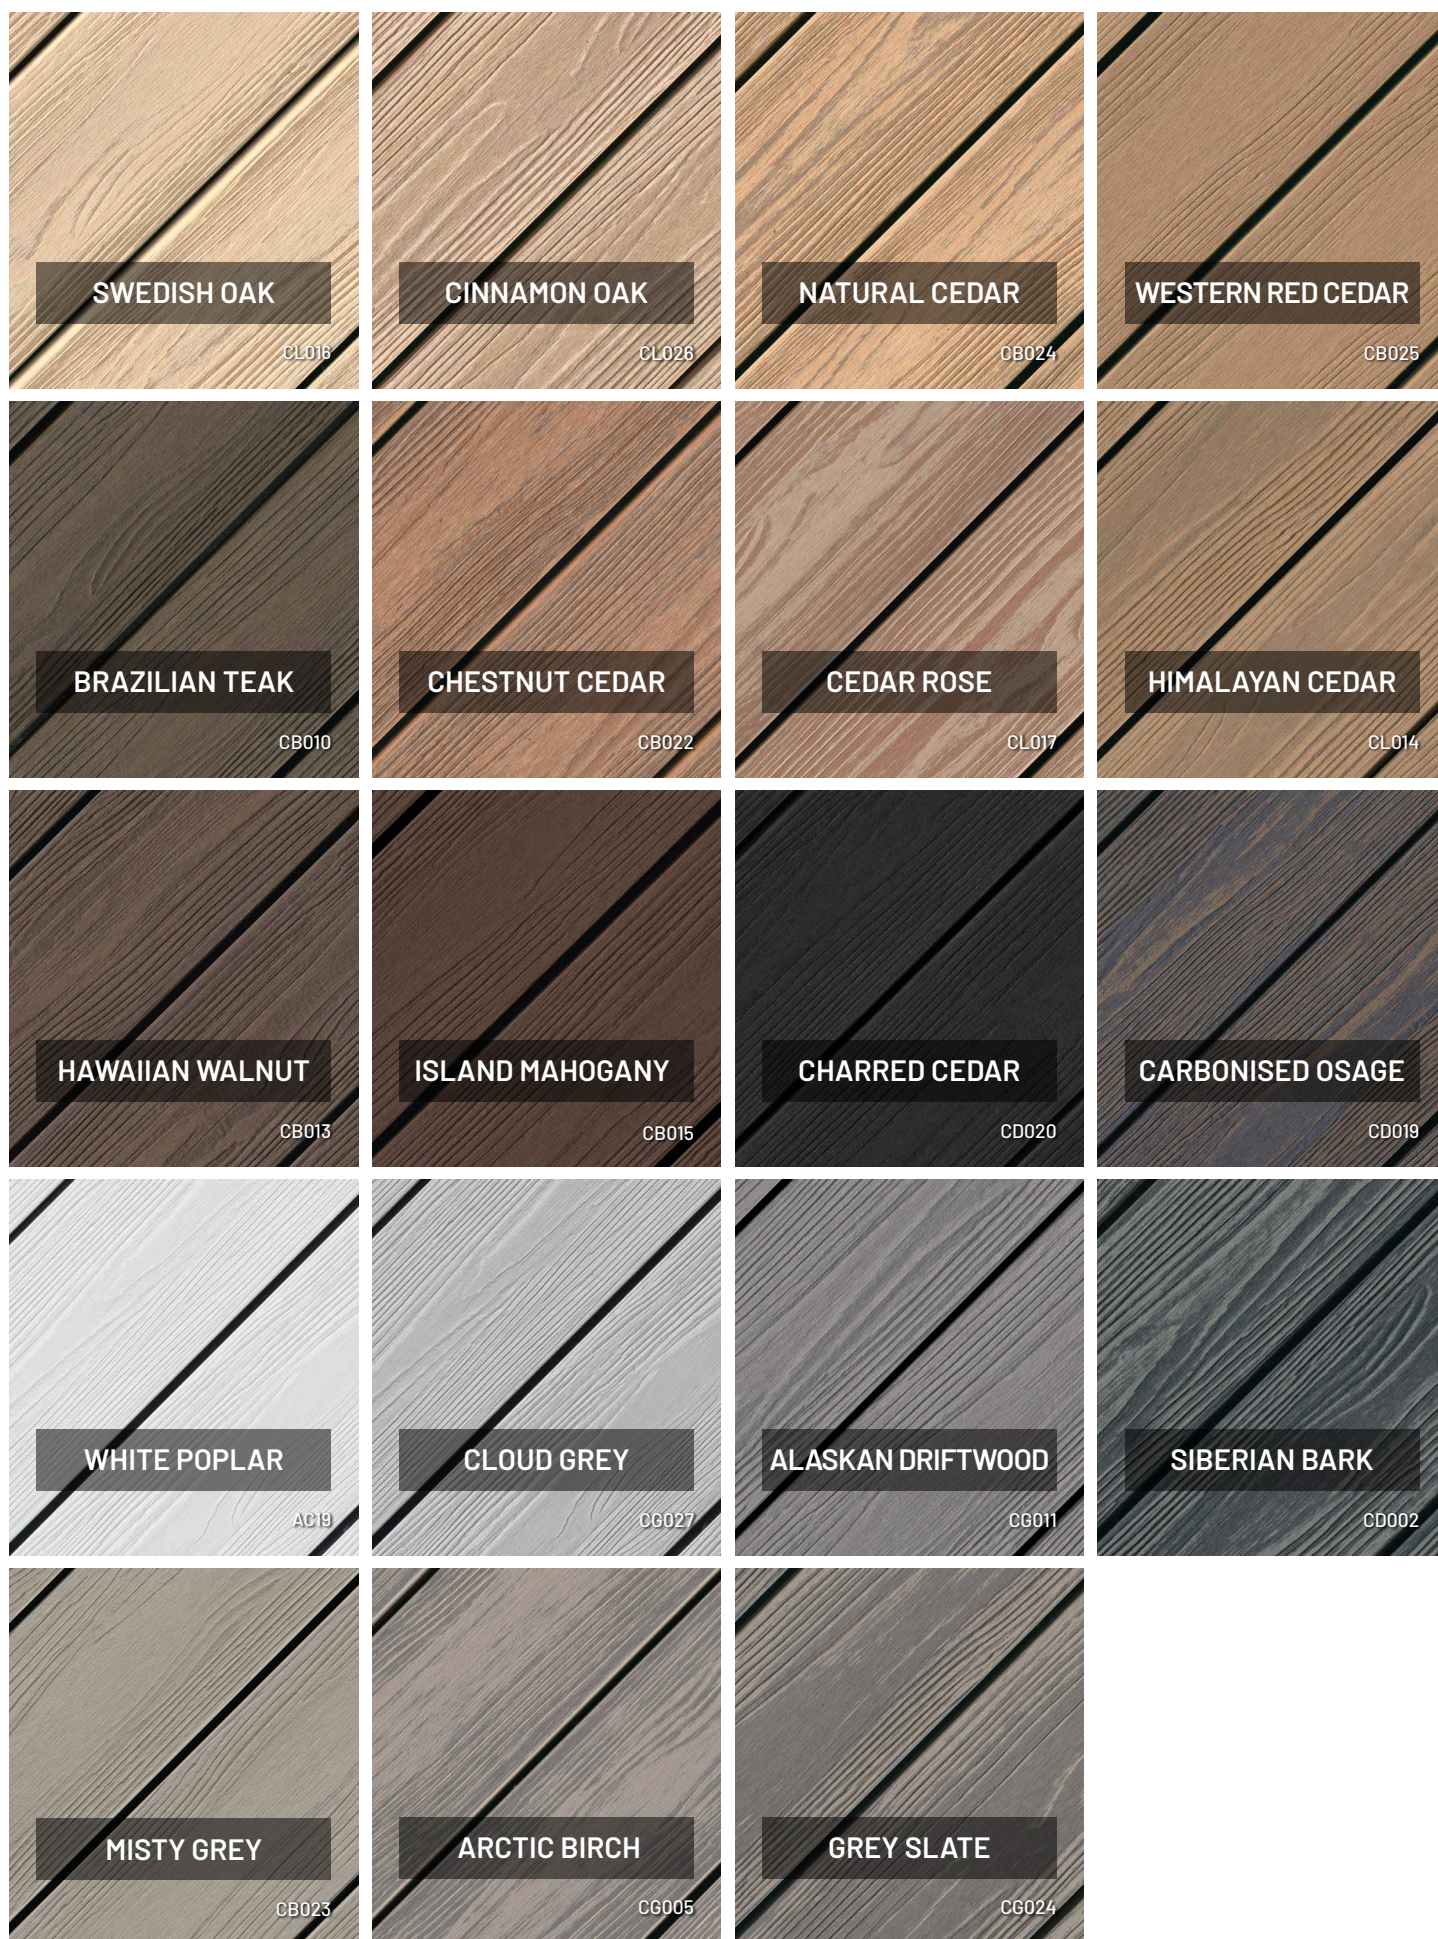

Note: Due to printing and/or screen variations, colours in this brochure may differ from the actual products. Physical samples will be sent for colour finalisation.

Note: To find out which colours are available in your region, please visit your local Eva-Last website.



LOW ENVIRONMENTAL IMPACT

Holistically sustainable manufacturing & use of raw materials



CHOOSE SUSTAINABLE BUILDING MATERIALS



RENEWABLE RESOURCES & RENEWABLE ENERGY

We believe that how we manufacture is just as important as what we manufacture when it comes to going green. That's why we've traded in fossil fuels for renewable energy. Our products use solar power as part of our manufacturing process. We are fully committed to bringing you a product that's holistically sustainable.

Every Eva-Last outdoor range pairs recycled raw ingredients with bamboo for a stronger, more sustainable composite. Bamboo rejuvenates over 30 times faster than traditional hardwoods and it releases 35% more oxygen into our air. Eva-Last is internationally recognised for our commitment to the environment. We're proud of the work we do to promote environmental sustainability, and invite you to choose timber alternatives that are gentle on the Earth.

- Made from recycled materials
- No trees felled
- No treatment or toxic chemicals required for maintenance
- Solar power used in the manufacturing process
- Reduced impact on landfills
- Reduced carbon footprint



Sales

E-mail: GlobalSales@eva-last.com

EVA-LAST®
INSPIRED BY NATURE, DESIGNED FOR LIFE.



www.eva-last.com

© 2025 Eva-Last reserves the rights to all brands, products, and trademarks within this publication.
Eva-Last ITEM: INT APEX BROCHURE - 0925 V1

Disclaimer:

Although we make every effort to ensure the information contained in this brochure is accurate, we are NOT responsible for any errors or misprint that occurs and we are NOT responsible for ANY damage or liability that result from the use (or misuse) of the information. In the event that an error does occur, we reserve the right to correct, or make changes to, this information at any time.

Disclaimer:

Span data provided herein is indicative based on specific test load conditions (refer to your product Technical Data Sheet). Dimensional and mass data provided herein is indicative based on typical production and may vary with manufacture and material tolerance. Before installing any Eva-Last product, ensure that the application is rational and complies with the local regulations and building codes. Wherever necessary, consult a suitably qualified professional.